

10/18/00
JCS50 U.S. PTO

10/20/00

A

PATENT

ATTORNEY DOCKET NO. ACBL049.00US

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In In re application of: Sam Schaevitz *et al*

) Examiner: Not Yet Assigned

Serial No.: Not Yet Assigned

) Art Unit: Not Yet Assigned

Filed: 18 October 2000

) UTILITY PATENT APPLICATION

For: Efficient microfluidic sealing

) TRANSMITTAL

JCS50 U.S. PTO
09/691957
10/18/00

BOX PATENT APPLICATION

Director of Patents and Trademarks
Washington, D.C. 20231

Sir:

This is a request for filing a patent application under 37 C.F.R. § 1.53(b) in the name of inventors: Sam Schaevitz, Travis Boone, Torleif Ove Bjornson

For: Efficient microfluidic sealing

This application claims priority of U.S. Patent Provisional Application Serial No. 09/545,064 filed on October 22, 1999 under 35 U.S.C. § 119(e).

Application Elements:

11 Pages of Specification, Claims and Abstract


3 Sheet of formal Drawings

CERTIFICATE OF EXPRESS MAILING

"Express Mail" Label No. EL63719 4076 US

Date of Deposit: 10-18-00

I hereby certify under 37 C.F.R. 1.10 that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" with sufficient postage on the date indicated above and is addressed to BOX PATENT APPLICATION, Commissioner of Patents and Trademarks, Washington, D.C., 20231.

(Signature) 

(Printed Name) Francis Guerra

09691957-101800

☒ Declaration

- ☒ Unexecuted Combined Inventor Declaration and Power of Attorney
☐ Copy from prior application (37 CFR 1.63(d) for a continuation or divisional).

The entire disclosure of the prior application from which a copy of the declaration is herein supplied is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

- ☐ Deletion of inventors Signed statement attached deleting inventor(s) named in the prior application, *see* CFR 1.63(d)(2) and 1.33(b).

Accompanying Application Parts:

- ☐ Assignment and Assignment Recordation Cover Sheet (recording fee of \$40.00 enclosed)
☐ Power of Attorney
☐ 37 CFR 3.73(b) Statement by Assignee
☐ Information Disclosure Statement with Form 1449
☐ Copies of IDS Citations
☐ Preliminary Amendment
☒ Return Receipt Postcard
☒ Small Entity Statement(s) ☒ Statement filed in prior application.
Status still proper and desired.
☐ Other:
☐ A sequence listing.
☐ paper copy.
☐ computer readable copy.
☐ Statement in Compliance with Requirements for Patent Applications Containing Nucleotide and/or Amino Acid Sequence.

Claim For Foreign Priority

- ☐ Priority of _____ Application No. _____ filed on _____ is claimed under 35 U.S.C. § 119
☐ The certified copy has been filed in prior application U.S. Application No. _____
☐ the certified copy will follow.

Extension of Time for Prior Pending Application

- ☐ A Petition for Extension of Time is being concurrently filed in the prior pending application. A copy of the Petition for Extension of Time is attached.

Amendments

- ☐ Amend the specification by inserting before the first line the sentence: "This is a
☐ Continuation ☐ Continuation-in-part ☐ Nonprovisional application of
copending prior
- ☐ Application Serial No. 60/153,644 filed on September 13, 1999.
- ☐ International Application _____ filed on _____, which
designated the United States, disclosure of which is incorporated herein by reference."
- ☐ Cancel in this application original claims _____ of the prior application before
calculating the filing fee

Fee Calculation (37 CFR § 1.16):

	(Col. 1)	(Col. 2)	<u>SMALL</u> <u>ENTITY</u>		<u>OTHER THAN A</u> <u>SMALL ENTITY</u>	
<u>FOR:</u>	<u>NO. FILED</u>	<u>NO.</u> <u>EXTRA</u>	<u>RATE</u>	<u>FEE</u>	<u>RATE</u>	<u>FEE</u>
Basic Fee			\$355	\$355	\$690	\$
Total Claims	14		\$ 9	\$	\$ 18	\$
Indep. Claims	3		\$ 39	\$	\$ 78	\$
<input type="checkbox"/> Multiple Dep. Claims			\$130	\$0	\$260	\$
Total Filing Fee:				\$355		

TOTAL FEES: \$355.00

- ☒ A check including the amount of **\$355.00** is attached.
- ☐ Please charge Deposit Account No.18-0020 in the amount of \$.
- ☐ No fee is required.

- [X] Conditional Petition for Extension of Time: An extension of time is requested in the present and/or the above-referenced parent application to provide for timely filing if an extension of time is still required after all papers filed with this transmittal have been considered.
- [X] The Commissioner is hereby authorized to charge any underpayment of the following fees associated with this communication, including any necessary fees for extension of time, or credit any overpayment to Deposit Account No. 18-0020.
- [X] Any filing fees under 37 CFR 1.16 including fees for the presentation of extra claims.
- [X] Any parent application processing fees under 37 CFR 1.17.
- [X] A **duplicate** copy of this sheet is attached for accounting purposes.

Respectfully submitted,

Dated: October 18, 2000

By: Barbara Rae-Venter
Barbara Rae-Venter, Ph.D.
Reg. No. 32,750

Rae-Venter Law Group, P.C.
P.O. Box 60039
Palo Alto, California 94306
Telephone: (650) 328-4400
Facsimile: (650) 328-4477

BRV/jea
Enclosures

APPLICATION

FOR

UNITED STATES LETTERS PATENT

TITLE: EFFICIENT MICROFLUIDIC SEALING

INVENTORS: SAM SCHAEVITZ, TRAVIS BOONE,
TORLIEF OVE BJORNSON

CERTIFICATE OF EXPRESS MAILING


"Express Mail" Label No.: EL63719487605

Date of Deposit: 10-18-00

I hereby certify under 37 C.F.R. 1.10 that this correspondence is being deposited with the United States Postal Service as "Express Mail Post Office to Addressee" with sufficient postage on the date indicated above and is addressed to Box Patent Application, Assistant Commissioner of Patents and Trademarks, Washington, D.C. 20231.

(Signature)

(Printed Name)


Francis Guerra

EFFICIENT MICROFLUIDIC SEALING

CROSS-REFERENCE TO RELATED APPLICATIONS

5 This application claims the benefit of the filing date of U.S. provisional application 09/545,064 filed October 22, 2000, which disclosure is hereby incorporated by reference.

INTRODUCTION

Field of the Invention

10 The field of this invention is microfluidic devices.

Background

15 Microfluidic devices offer great promise for the accurate manipulation of very small volumes, the rapid execution of a wide variety of operations, the minimal use of reagents, as well as many other benefits. As with all situations, the benefits come with challenges. For many purposes, one wishes to have a number of independent electrokinetic units in a single substrate. Since each unit will frequently comprise a plurality of reservoirs and channels, it is
20 important that the individual units do not communicate except as required by the design of the device. Also importantly, is the problem of the very small volumes, which are frequently involved with the operations, due to evaporation. Where there is an interest in doing a quantitative analysis of an operation involving kinetics, it is important that the solvent volume remain substantially constant, so that the concentrations of the reactants are not changing due to
25 decreasing volume. To this end, methods are required to minimize evaporation. Additionally, particularly where long incubation times and/or long reaction times are involved, there is an interest in preventing contamination. A further concern is adventitious pressurization, during closing of a microstructure vessel, which could prematurely move the liquid from a reservoir into a channel.

30 In response to these concerns, lids have been used to seal the ports of microfluidic devices. Lids may provide sealing through the pressure of their weight, by providing adhesion, using various forms of latches or clasps, or by fitting snugly around a part and held by friction.

There is an interest in developing devices and methods to substantially diminish the injurious events that may occur due to open ports of a microfluidic device, where the devices are effective and can be readily fabricated and methods readily performed.

Relevant Art

U.S. Patent no. 5,4443, 890 and references cited therein describe leakage-proof sealing of microfluidic devices. WO99/43432 describes microfluidic devices and systems incorporating cover layers. U.S. Patent no. 5,545,280 describes applying adhesive to protrusions on a substrate.

SUMMARY OF THE INVENTION

Improved microfluidic devices are provided for use in performing operations involving the manipulation of small volumes. Substrates are formed comprising channels and reservoirs, where the channels communicate with the reservoirs and the channels are otherwise enclosed, and the reservoirs have an aligned collar in relief, extending beyond the planar surface of the substrate and outwardly from the border of the reservoir. The reservoirs are more efficiently sealed with an appropriate cover which contacts the crown of the collar. The substrates may be formed by plastic molding or other means. Of particular interest are devices employing electrokinesis for movement of solutions from one site to another in the device, where the substrate comprises a plurality of individual electrokinetic units and the volumes involved generally are below about 5 μ l.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a plan view of a device with collars around microstructures; Fig. 1a is a cross-sectional view of the device of Fig. 1 along lines 1a-1a;

Fig. 2 is a plan view of the device of Fig. 1, with the collars removed to provide details of the individual units; Fig. 2a is a diagrammatic exploded view of the units of Fig. 2;

Fig. 3 is a side elevation cross-sectional view of a reservoir microstructure of a unit with a cover.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

The following examples are offered by way of illustration of the present invention, not
5 limitation. Microfluidic devices are provided for manipulation of small volumes, where the
devices comprise a substrate, usually an organic substrate in which are channels and reservoirs,
where the reservoirs have a raised collar above the planar surface of the substrate. A bottom
film, including a rigid substrate, is adhered to and encloses the channels and the bottoms of the
reservoirs. The reservoirs can be sealed on the top side using a film, which seals to the upper
10 surface of the collar.

The microfluidic devices will be characterized by having one or more operational units
present in the substrate, where the number of units may vary from 16 to 1536 units, more usually
not more than about 384 units, the number of units frequently being related to the number of
wells in a microtiter well plate. Each unit will have at least one channel and at least two
15 reservoirs, usually having at least two channels and at least four reservoirs. The total number of
reservoirs for a device will generally be in the range of about 4 to 1600, more usually in the
range of about 64 to 1500.

The sealing cover or lid will be a film, which forms a seal about the collar, so as to at
least substantially inhibit fluid flow from the reservoir. The cover will provide for sealing
20 interaction with the collar upper surface, as a result of a compliant surface contacting the collar
or an adhesive surface adhering to the upper surface of the collar, particularly an adhesive
surface, which is removable. Contact will usually be minimal or not at all between the sealing
cover or lid and the planar surface. The forces providing the sealing may be gravity, adhesive
forces, or mechanical forces. For compliant surfaces, such as elastomeric films, skin-surface
25 (closed-cell) foams, soft films, pressure would be applied, as a result of a weighted backing,
latching or gripping devices for holding the film against the collars, a vacuum chuck which
holds the film in position and can release the film, as appropriate, etc. The film may be stretched
across the collars, held in position by clasps at the periphery of the substrate, a sealing pliable
band around the periphery, a vacuum chuck, etc. A continuous sealing film may be used, which
30 may be unrolled from a reel as the devices are moved in a continuous manner, for example, on a
wheel or moving belt. The films may be natural rubber, polyisoprene, ethylene-propylene

elastomers, polyurethane foams, polydimethylsiloxane, etc. The films may be thin or thick, so long as they have a minimum dimension, which provides for their sealing of the collars. Generally, the films will be at least about 50 μ m in thickness. Alternatively, films may be used, which have a thin adherent layer, which will adhere to the surface of the collar and after the film

5 has fulfilled its function, the adhesive may be removed. Useful adhesives include pressure sensitive adhesives, such as ethylene-containing polymers, urethane polymers, butyl rubber, butadiene-acrylonitrile polymers, butadiene-acrylonitrile-isoprene polymers, and the like. See, for example, U.S. Patent no. 5,908,695 and references cited therein.

The substrate will generally have a thickness of at least about 20 μ m, more usually at least about 40 μ m, and not more than about 0.5cm, usually not more than about 0.25cm. The width of the substrate will be determined by the number of units to be accommodated and may be as small as about 2mm and up to about 6cm or more. The dimension in the other direction will generally be at least about 0.5cm and not more than about 20cm, usually not more than about 10cm. The substrate may be a flexible film or relatively inflexible solid, where the

10 microstructures, such as reservoirs and channels, may be provided by embossing, molding, machining, etc. The collars may be formed at the same time using the same process, although more expensive processes may be used, such as photolithography or laser ablation. In this case, the collar regions would be protected while the substrate was eroded. The channel dimensions will generally be in the range of about 0.1 μ m to 1mm deep and about 0.5 μ m to 500 μ m wide,

15 where the cross-section will generally be 0.1 μ m² to about 0.25mm². The channel lengths will vary widely depending on the operation for which the channel is to be used, generally being in the range of about 0.05mm to 10cm, more usually in the range of about 0.5mm to 1cm. The reservoirs will generally have volumes in the range of about 10nl to 10 μ l, more usually have volumes in the range of about 20nl to 1 μ l. The reservoirs may be cylindrically shaped or

20 conically shaped, particularly inverted cones, where the diameter of the port will be from about 1.5 to 25 times, usually 1.5 to 15 times, the diameter of the bottom of the reservoir, where the reservoir connects to the channel.

Depending upon whether a film is embossed to produce the device or the device is molded, whether the microfeatures are left open will depend upon whether a supporting film

30 and/or an enclosing film is provided. The supporting film will generally be at least about 40 μ m and not more than about 5mm thick. The film used to enclose the channels and the bottom of

the reservoirs will generally have a thickness in the range of about 10 μ m to 2mm, more usually in the range of about 20 μ m to 1mm. The selected thickness is primarily one of convenience and assurance of good sealing and the manner in which the devices will be used to accommodate instrumentation. Therefore, the ranges are not critical.

5 The collars surrounding the reservoir ports will generally have a height from the planar surface of the substrate in the range of about 0.1 to 1mm, more usually about 0.2 to 1mm, and preferably about 0.25 to 0.75mm. The crown will be thick enough to provide a good seal between the sealing film or lid and the crown, so that usually it will be about 0.05 to 1mm thick, more usually about 0.1 to about 0.5mm thick. The collars may be considered extensions of the
10 inner walls of the microstructures, having an inner wall aligned with the inner wall of the microstructure, where the collars then extend outwardly from the inner wall, much like the structure of a volcano. Alternatively, the collar inner wall may be displaced from the reservoir inner wall, generally displaced less than about 1mm, usually less than about 0.5mm and may be less than about 0.1mm. In this way the inner wall is offset from the edge of the reservoir,
15 serving as a fence around the reservoir.

The area occupied by a single unit will vary widely, depending on the number of units of the device, the function of the units, and the like. As illustrative, for the most part, where the devices are designed to be compatible with 96 to 384 microtiter well plates, the units will have from about 4.5 to 9mm spacings.

20 As indicated, the substrate may be a flexible film or inflexible solid, so the method of fabrication will vary with the nature of the substrate. For embossing, at least two films will be used, where the films may be drawn from rolls, one film embossed and the other film adhered to the embossed film to provide a physical support. The individual units may be scored, so as to be capable of being used separately, or the roll of devices retained intact. See, for example,
25 application serial no. PCT/98/21869. Where the devices are fabricated individually, they will usually be molded, using conventional molding techniques. The substrates and accompanying film will generally be plastic, particularly organic polymers, where the polymers include addition polymers, such as acrylates, methacrylates, polyolefins, polystyrene, etc. or condensation polymers, such as polyethers, polyesters, polyamides, polyimides, etc. Desirably,
30 the polymers will have low fluorescence inherently or can be made so by additives or bleaching. The underlying enclosing film will then be adhered to a substrate by any convenient means, such

as thermal bonding, adhesives, etc. The literature has many examples of adhering such films, see, for example, U.S. Patent nos. 4,558,333; and 5,500,071.

Liquids may be moved through the units by any convenient means, including electrokinesis, pneumatics, sonics, thermal, etc. Electrokinetic devices will usually have two or more reservoirs connected by microchannels, where the microchannels may cross, providing for injection of a plug from one microchannel into another microchannel. The devices may find use in sequencing of nucleic acids, detection of binding between two entities, e.g. proteins with proteins, small molecules or cells, or various assays for the determination of drugs, single nucleotide polymorphisms, etc.

The methods employing the subject devices may be associated with the transfer to the microstructures of the devices of volumes ranging from about 10nl to 500µl, with reaction volumes ranging from about 20nl to 0.5ml, usually 50nl to 0.1ml. The volumes may be transferred by any efficient means, including pins, ink-jet dispensers, other piezoelectric devices, pipettes, etc. After the liquid is dispensed, the applicable seal may be applied. Instead of dispensing liquid into the microstructure, the process may involve withdrawing liquid from the microstructure. Where the seal is in place, the seal would be removed, the liquid withdrawn from the microstructure and the seal replaced. In this way the integrity of the concentration of the solution in the microstructure may be maintained. Alternatively, one may have a self-sealing film, where the seal would be pierced for the transfer of liquid.

For further understanding of the invention, the drawings will now be considered. In Fig. 1 is depicted a plan view of a microfluidic device having 96 units with the spacing appropriate to a 96 well microtiter plate, where the spacing of the collars is shown. The device 100 has a substrate 102 with collars 104 associated with the reservoirs 106. In Fig. 1a, a cross-sectional view is shown of the device 100. The device 100 is shown with reservoirs 106, only two reservoirs being shown for clarity. Above the reservoirs 106 on the upper planar surface 108 of the device are collars 104. An enclosing film 110 provides the bottom of the device, serving to enclose the reservoirs 106 and channels 112.

In Fig. 2, the device 150 is shown with the sealing film removed to provide the detail of the individual microfluidic units 152. An expanded version of the microfluidic units 152 is depicted in a diagrammatic plan view in Fig. 2a. This unit is for illustration purposes only and demonstrates a unit for performing a reaction with incubation, followed by separating the

components of the reaction mixture using electrophoresis and identifying the product with a detector, not shown. The unit 152 has a separation channel 154, beginning with electrophoresis buffer reservoir 156 and terminating in waste reservoir 158. The assay channel 160 begins with a reagent incubation reservoir 162 and ends with a second waste reservoir 164. The reagent incubation reservoir 162 receives the various components of the reaction where the reagents may react. Some of the liquid in the reagent incubation reservoir 162 may wick by capillary action through the separation channel to a stop-junction reservoir 168 provided in assay channel 160 to stop the movement of the reaction solution. After sufficient time for incubation liquid remaining in the reagent incubation reservoir 162 is moved by pressure to the stop-junction reservoir 168 and the electrophoretic process begun by introducing electrodes into the waste reservoirs 158 and 164, the stop-junction reservoir 168 and the buffer reservoir 156. By activating the electrodes in the stop-junction reservoir 168 and the waste reservoir 164, the reaction components may be moved to cross-section 166 for injection into separation channel 154. The electrodes in the reservoirs 164 and 168 may then be allowed to float, while the electrodes in buffer reservoir 156 and waste reservoir 158 are activated for electrophoretic transport and separation in separation channel 154 for detection of product.

In Fig. 3 is shown a cross-section of a reservoir with the collar on a substrate. The substrate 200 has an upper planar surface 202. Extending upward from upper planar surface 202 is the external wall of collar 204. As shown in the Figure, the collar 204 meets with the upper opening 206 of reservoir 208. The wall 210 of reservoir 208 is shown as conical having a linearly even surface, but could be vertical or irregular, as needed. The reservoir wall 210 is aligned with the collar wall 204, having a smooth transition, being a single feature when molding the substrate. As already indicated, the collar inner wall may be offset from the port edge. The reservoir 208 terminates at the bottom into channel 212. The channel 212 is enclosed by film 214, which adheres to the bottom surface 216 of the substrate. The reservoir 208 is enclosed by a conformable cover film 218, backed by a weighted backing 220, to hold the film 218 in sealing relationship with the top surface 222 of collar 204.

The subject invention provides many advantages in enclosing, usually reversibly, small reservoirs or other microstructure. The subject collar structure has a small contact area, which serves to concentrate the force produced by whatever means of application of the lid onto a much smaller area, as compared to a cover which bonds to the entire surface of the device. A

reduction in differential pressures created during application of the lid is achieved. Where the upper surface is flat, without areas in relief, a conformal lid comes down in such a way that it will usually first make contact with a large ring around the area to be sealed. The air trapped within this ring is pressurized into the volume to be sealed. By contrast with the subject

5 structure, the lid makes contact before it reaches the device main surface, avoiding trapping large volumes of air. In addition, for lid attachment mechanisms like gravity, friction and mechanical clips, where the force is not directly related to the contact area, the subject method increases the local pressure with which the lid is attached to the part. This increased pressure generally improves the seal and improves the proximity of conformal lids. This improved seal can enable

10 the use of a weighted lid to produce an airtight seal without requiring a large mass or an extremely conformable lid material. Where the seal is substantially air tight, the lid will act to resist or prevent fluid flow. Capillary stop junctions may be prone to failure by condensation or other mechanism, in which case the sealed lid provides a backup mechanism. Also, the sealed lid can easily counteract relatively strong fluidic forces, such as surface tension. Yet another

15 advantage of the collar is that the effective leakage path (surface path) between two adjacent wells is increased. This increases the resistance to arcing due to high differential voltages in two adjacent wells. In fact, multiple concentric collars would be beneficial in further reducing this problem. Finally, during application and removal of a lid, there is a potential for liquids to wick between the lid and the surface of the device and microstructures. The short distance between

20 the device and the lid can result in very strong capillary pressures. In the subject invention the lid is only in close proximity to the collar surface, so that fluid can only wick along that surface. By avoiding continuous ridges between different microstructures, movement of liquid between the microstructures can be obviated.

All publications and patent applications mentioned in this specification are indicative of

25 the level of skill of those skilled in the art to which this invention pertains. All publications and patent applications are herein incorporated by reference to the same extent as if each individual publication or patent application was specifically and individually indicated to be incorporate by reference.

The invention now having been fully described, it will be apparent to one of ordinary

30 skill in the art that many changes and modifications can be made thereto without departing from the spirit or scope of the appended claims.

WHAT IS CLAIMED IS:

1. A microfluidic device comprising a substrate having a planar surface, a plurality of openings in said surface of microstructures and at least a portion of said openings
5 surrounded by a collar in relief.
2. A microfluidic device according to Claim 1, wherein said collar has its inner surface aligned with the inner surface of said opening and a thickness of from about 0.05 to 0.5mm thick extending away from said inner surface.
3. A microfluidic device according to Claim 2 wherein said collar is covered with a lid of a conformable material.
4. A microfluidic device according to Claim 2, wherein said collar is covered with a lid
10 with an adhesive coating.
5. A microfluidic device according to Claim 1 produced by plastic molding.
6. A microfluidic device comprising a substrate having a planar surface, a plurality of
15 reservoirs having openings in said surface, said reservoirs having volumes in the range of about 10nl to 10 μ l and at least a portion of said openings surrounded by a collar in relief, having an inner surface aligned with the inner surface of said reservoir, said collar having a height in the range of about 0.1 to 1mm and thickness of from about 0.05 to 0.5mm thick extending away from said inner surface.
- 20 7. A microfluidic device according to Claim 6, where at least a portion of said reservoirs are connected to one or more other reservoirs by microchannels.
8. A microfluidic device according to Claim 6, wherein at least a portion of said reservoirs are positioned in accordance with a 96, 384 or 1536 microtiter well format.
9. A microfluidic device according to Claim 6, wherein said collar is covered with a lid.
- 25 10. A microfluidic device according to Claim 9, wherein each collar is covered with a lid, which lid is a portion of a continuous film.
11. A microfluidic device according to Claim 6, wherein said substrate comprises an acrylic polymer and is molded.
- 30 12. In a method employing a microfluidic device comprising introducing small volumes into microstructures, where the volumes comprise volatile solvents, the improvement which

comprises: introducing said small volumes into a device according to Claim 1; and
applying a compliant or adhesive lead to each of said collars.

13. A method according to Claim 12, wherein said lid is a portion of a continuous film.
14. A method according to Claim 12, wherein said microstructures are components of an
electrokinetic device.

5

000101 2216960

EFFICIENT MICROFLUIDIC SEALING**ABSTRACT OF THE DISCLOSURE**

5

Improved sealing for microstructures in microfluidic devices having a plurality of units is provided by providing collars surrounding the openings to the microstructures, such as reservoirs. The collars are protrusions extending from the surface of the devices and the internal walls of the collars generally aligned with the internal walls of the microstructure. Conformable and/or adhesive lids are employed for sealing the microstructures.

10

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188

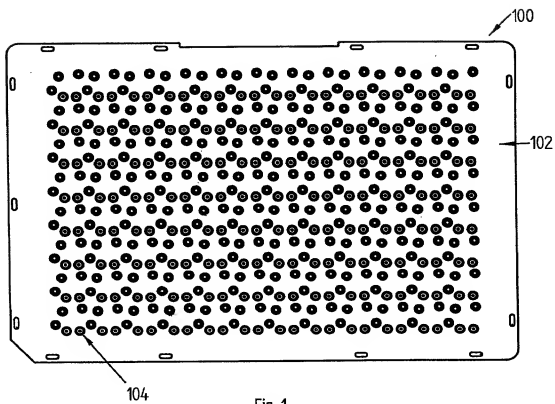


Fig. 1




Fig. 1a



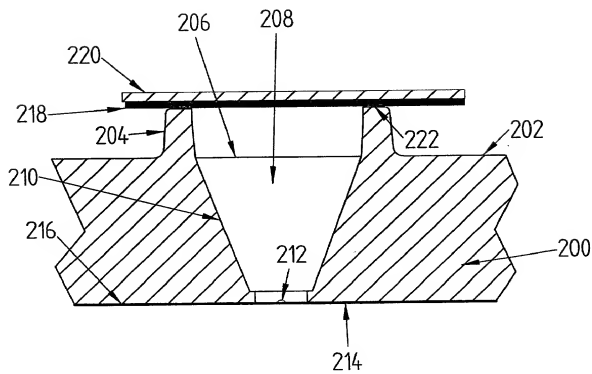


Fig. 3

**COMBINED INVENTOR
DECLARATION AND POWER OF ATTORNEY**

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Efficient microfluidic sealing

the specification of which

(check one) ☐ Is attached hereto.
☐ Was filed on and has been assigned Serial Number .
☒ Was filed on October 18, 2000 as Attorney Docket No.
ACBI.049.00US.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information known to me to be material to patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 and, if applicable, all such information under 37 CFR § 1.56 which became available between the national or PCT International filing date of the prior application and the filing date of this application.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

(number) (Country) (Day/Month/Year Filed)

Priority Claimed

☐ Yes ☐ No

Prior Foreign Application(s)

(number) (Country) (Day/Month/Year Filed)

Priority Claimed

☐ Yes ☐ No

000101-25616950

Prior Foreign Application(s)

Priority Claimed

(number)	(Country)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
----------	-----------	------------------------	------------------------------	-----------------------------

I hereby claim the benefit under Title 35, United States Code, §119(e) of any provisional application and §120 of any non-provisional United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of 35 USC §112 I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

09/545,064 (Application Serial No.)	10/22/99 (Filing Date)	Pending (Status)
--	---------------------------	---------------------

(Application Serial No.)	(Filing Date)	(Status)
--------------------------	---------------	----------

(Application Serial No.) * designating the U.S.	(Filing Date)	(Status)
--	---------------	----------

I hereby appoint:

BARBARA RAE-VENTER, Ph.D., Reg. No. 32,750
BERTRAM I. ROWLAND, Ph.D., Reg. No. 20,015
JENNIFER WAHLSTEN, Ph.D., Reg. No. 46,226

as my attorneys or agents with full power of substitution and revocation to prosecute my above-identified application for Letters Patent and to transact all business in the Patent Office connected therewith.

Direct all telephone calls to Barbara Rae-Venter, Ph.D. at (650) 328-4400.

Address all correspondence to:

Bertram I. Rowland
Rae-Venter Law Group, P.C.
P. O. Box 60039
Palo Alto, California 94306-0039

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor: Sam Schaeviz

Inventor's signature: _____

Date: _____

Residence: MIT, 3 Ames Street Box 314 Cambridge, MA 02139

Citizenship: _____

Post Office Address: Same

Full name of second joint inventor, if any: Travis Boone

Inventor's signature: _____

Date: _____

Residence: 765 San Antonio Rd. #25 Palo Alto, CA 94303

Citizenship: USA

Post Office Address: Same

Full name of third joint inventor, if any: Torleif Ove Bjornson

Inventor's signature: _____

Date: _____

Residence: 7030 Daniel Court Gilroy, California 95020

Citizenship: Sweden

Post Office Address: Same